

Inverse problems in imaging and computer vision

From deterministic methods to probabilistic Bayesian inference

Ali Mohammad-Djafari

Groupe Problèmes Inverses
Laboratoire des Signaux et Systèmes
UMR 8506 CNRS - SUPELEC - Univ Paris Sud 11
Supélec, Plateau de Moulon, 91192 Gif-sur-Yvette, FRANCE.

djafari@lss.supelec.fr
<http://djafari.free.fr>
<http://www.lss.supelec.fr>

VISIGRAPP 2009, February 5-8, Lisboa, Portugal

Content

- ▶ Invers Problems : Examples and general formulation
- ▶ Inversion methods :
analytical, parametric and non parametric
- ▶ Deterministic methods : (Data matching, LS, Regularization)
- ▶ Probabilistic methods (Probability matching, Maximum likelihood, Bayesian)
- ▶ Bayesian inference approach
- ▶ Prior models for images
- ▶ Bayesian computation
- ▶ Applications (Computed Tomography, Image separation)
- ▶ Conclusions
- ▶ Questions and Discussion

Inverse problems : 3 main examples

- ▶ Example 1 :
Measuring variation of temperature with a thermometer
 - ▶ $f(t)$ variation of temperature over time
 - ▶ $g(t)$ variation of length of the liquid in thermometer
- ▶ Example 2 :
Making an image with a camera, a microscope or a telescope
 - ▶ $f(x, y)$ real scene
 - ▶ $g(x, y)$ observed image
- ▶ Example 3 : Making an image of the interior of a body
 - ▶ $f(x, y)$ a section of a real 3D body $f(x, y, z)$
 - ▶ $g_\phi(r)$ a line of observed radiographie $g_\phi(r, z)$
- ▶ Example 1 : Deconvolution
- ▶ Example 2 : Image restoration
- ▶ Example 3 : Image reconstruction

Measuring variation of temperature with a thermometer

- ▶ $f(t)$ variation of temperature over time
- ▶ $g(t)$ variation of length of the liquid in thermometer
- ▶ Forward model : Convolution

$$g(t) = \int f(t') h(t - t') dt' + \epsilon(t)$$

$h(t)$: impulse response of the measurement system

- ▶ Inverse problem : Deconvolution


Given the forward model $\mathcal{H}$ (impulse response $h(t)$)
and a set of data $g(t_i), i = 1, \dots, M$
find $f(t)$




Measuring variation of temperature with a thermometer

Forward model : Convolution

$$g(t) = \int f(t') h(t - t') dt' + \epsilon(t)$$

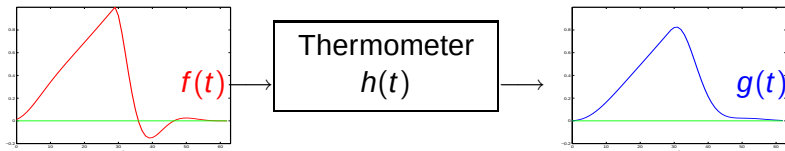


Inversion : Deconvolution

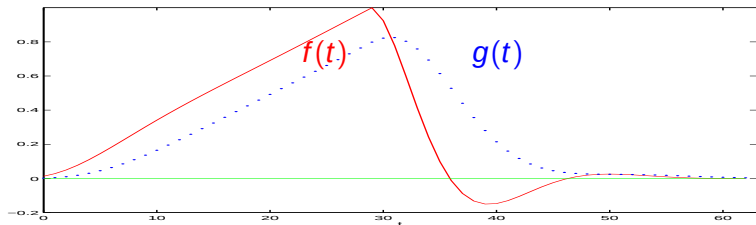

Making an image with a camera, a microscope or a telescope

- ▶ $f(x, y)$ real scene
- ▶ $g(x, y)$ observed image
- ▶ Forward model : Convolution



$$g(x, y) = \iint f(x', y') h(x - x', y - y') dx' dy' + \epsilon(x, y)$$

$h(x, y)$: Point Spread Function (PSF) of the imaging system


- ▶ Inverse problem : Image restoration

Given the forward model $\mathcal{H}$ (PSF $h(x, y)$)
and a set of data $g(x_i, y_i), i = 1, \dots, M$
find $f(x, y)$


Making an image with an unfocused camera

Forward model : 2D Convolution

$$g(x,y) = \iint f(x',y') h(x - x', y - y') dx' dy' + \epsilon(x,y)$$

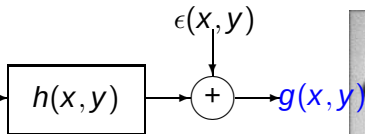


Inversion : Deconvolution

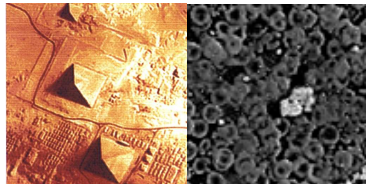

?

←

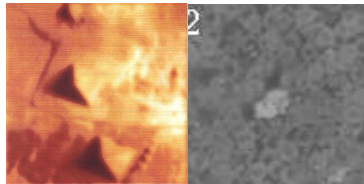


Making an image of the interior of a body

- ▶ $f(x, y)$ a section of a real 3D body $f(x, y, z)$
- ▶ $g_\phi(r)$ a line of observed radiographie $g_\phi(r, z)$
- ▶ Forward model :
Line integrals or Radon Transform



$$\begin{aligned} g_\phi(r) &= \int_{L_{r,\phi}} f(x, y) \, dl + \epsilon_\phi(r) \\ &= \iint f(x, y) \delta(r - x \cos \phi - y \sin \phi) \, dx \, dy + \epsilon_\phi(r) \end{aligned}$$

- ▶ Inverse problem : Image reconstruction

Given the forward model $\mathcal{H}$ (Radon Transform) and
a set of data $g_{\phi_i}(r), i = 1, \dots, M$
find $f(x, y)$



2D and 3D Computed Tomography



$$g_{\phi}(r_1, r_2) = \int_{\mathcal{L}_{r_1, r_2, \phi}} f(x, y, z) \, dl \quad g_{\phi}(r) = \int_{\mathcal{L}_{r, \phi}} f(x, y) \, dl$$

Forward problem : $f(x, y)$ or $f(x, y, z) \longrightarrow g_{\phi}(r)$ or $g_{\phi}(r_1, r_2)$

Inverse problem : $g_{\phi}(r)$ or $g_{\phi}(r_1, r_2) \longrightarrow f(x, y)$ or $f(x, y, z)$

Microwave or ultrasound imaging


Mesasures : diffracted wave by the object $\phi_d(\mathbf{r}_i)$

Unknown quantity : $f(\mathbf{r}) = k_0^2(n^2(\mathbf{r}) - 1)$

Intermediate quantity : $\phi(\mathbf{r})$

$$\phi_d(\mathbf{r}_i) = \iint_D G_m(\mathbf{r}_i, \mathbf{r}') \phi(\mathbf{r}') f(\mathbf{r}') d\mathbf{r}', \quad \mathbf{r}_i \in S$$

$$\phi(\mathbf{r}) = \phi_0(\mathbf{r}) + \iint_D G_o(\mathbf{r}, \mathbf{r}') \phi(\mathbf{r}') f(\mathbf{r}') d\mathbf{r}', \quad \mathbf{r} \in D$$




Born approximation ($\phi(\mathbf{r}') \simeq \phi_0(\mathbf{r}')$) :

$$\phi_d(\mathbf{r}_i) = \iint_D G_m(\mathbf{r}_i, \mathbf{r}') \phi_0(\mathbf{r}') f(\mathbf{r}') d\mathbf{r}', \quad \mathbf{r}_i \in S$$

Discretization :

$$\begin{cases} \phi_d = G_m \mathbf{F} \phi \\ \phi = \phi_0 + G_o \mathbf{F} \phi \end{cases} \longrightarrow \begin{cases} \phi_d = H(\mathbf{f}) \\ \text{with } \mathbf{F} = \text{diag}(\mathbf{f}) \\ H(\mathbf{f}) = G_m \mathbf{F} (\mathbf{I} - G_o \mathbf{F})^{-1} \phi_0 \end{cases}$$





Invers Problems : other examples and applications

- ▶ X ray, Gamma ray Computed Tomography (CT)
- ▶ Microwave and ultrasound tomography
- ▶ Positron emission tomography (PET)
- ▶ Magnetic resonance imaging (MRI)
- ▶ Photoacoustic imaging
- ▶ Radio astronomy
- ▶ Geophysical imaging
- ▶ Non Destructive Evaluation (NDE) and Testing (NDT) techniques in industry
- ▶ Hyperspectral imaging
- ▶ Earth observation methods (Radar, SAR, IR, ...)
- ▶ Survey and tracking in security systems

Computed tomography (CT)

A Multislice CT Scanner

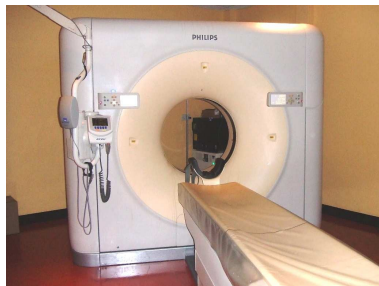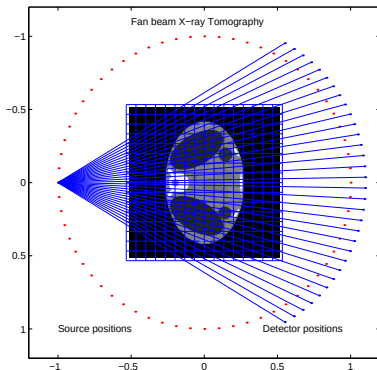


$$g(s_i) = \int_{L_i} f(\mathbf{r}) \, dl_i + \epsilon(s_i)$$

Discretization

$$\mathbf{g} = \mathbf{H}\mathbf{f} + \epsilon$$

Photoacoustic imaging

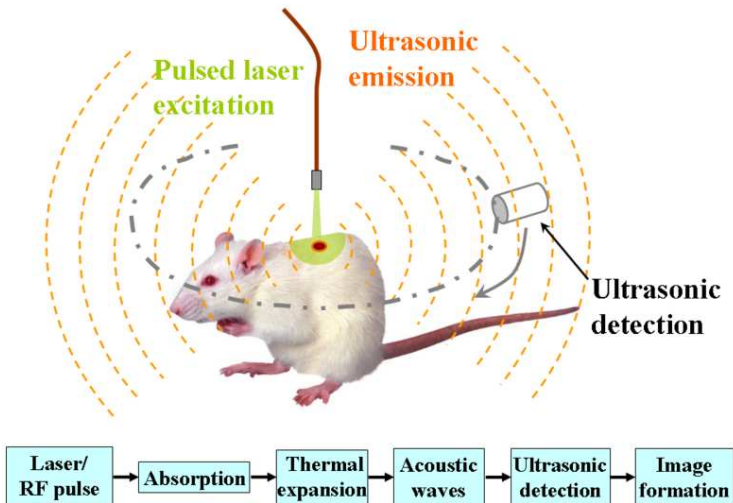

Positron emission tomography (PET)



Magnetic resonance imaging (MRI)

Nuclear magnetic resonance imaging (NMRI), Para-sagittal MRI of the head



Radio astronomy (interferometry imaging systems)

The Very Large Array in New Mexico, an example of a radio telescope.



General formulation of inverse problems

- ▶ General non linear inverse problems :

$$g(s) = [\mathcal{H}f(r)](s) + \epsilon(s), \quad r \in \mathcal{R}, \quad s \in \mathcal{S}$$

- ▶ Linear models :

$$g(s) = \int f(r) h(r, s) \, dr + \epsilon(s)$$

If $h(r, s) = h(r - s) \longrightarrow$ Convolution.

- ▶ Discrete data :

$$g(s_i) = \int h(s_i, r) f(r) \, dr + \epsilon(s_i), \quad i = 1, \dots, m$$

- ▶ Inversion : Given the forward model $\mathcal{H}$ and the data

$$g = \{g(s_i), i = 1, \dots, m\} \quad \text{estimate } f(r)$$

- ▶ Well-posed and **Ill-posed** problems (Hadamard) :

existence, uniqueness and stability

- ▶ Need for **prior information**

Analytical methods (mathematical physics)

$$g(s_i) = \int h(s_i, r) f(r) dr + \epsilon(s_i), \quad i = 1, \dots, m$$

$$g(s) = \int h(s, r) f(r) dr$$

$$\hat{f}(r) = \int w(s, r) g(s) ds$$

$w(s, r)$ minimizing a criterion :

$$\begin{aligned} Q(w(s, r)) &= \left\| g(s) - [\mathcal{H}\hat{f}(r)](s) \right\|_2^2 = \int \left| g(s) - [\mathcal{H}\hat{f}(r)](s) \right|^2 ds \\ &= \int \left| g(s) - \int h(s, r) \hat{f}(r) dr \right|^2 ds \\ &= \int \left| g(s) - \int h(s, r) \left[\int w(s, r) g(s) ds \right] dr \right|^2 ds \\ &= \int \left| g(s) - \int \int h(s, r) w(s, r) g(s) ds dr \right|^2 ds \end{aligned}$$

Analytical methods

- ▶ Trivial solution :

$$w(s, r) = h^{-1}(s, r)$$

Example : Fourier Transform :



$$g(s) = \int f(r) \exp \{-js.r\} dr$$

$$h(s, r) = \exp \{-js.r\} \longrightarrow w(s, r) = \exp \{+js.r\}$$

$$\hat{f}(r) = \int g(s) \exp \{+js.r\} ds$$

- ▶ Known classical solutions for specific expressions of $h(s, r)$:
 - ▶ 1D cases : 1D Fourier, Hilbert, Weil, Melin, ...
 - ▶ 2D cases : 2D Fourier, Radon, ...

X ray Tomography




$$g(r, \phi) = -\ln \left(\frac{I}{I_0} \right) = \int_{L_{r, \phi}} f(x, y) \, dl$$


$$g(r, \phi) = \iint_D f(x, y) \delta(r - x \cos \phi - y \sin \phi) \, dx \, dy$$



IRT
?



Analytical Inversion methods

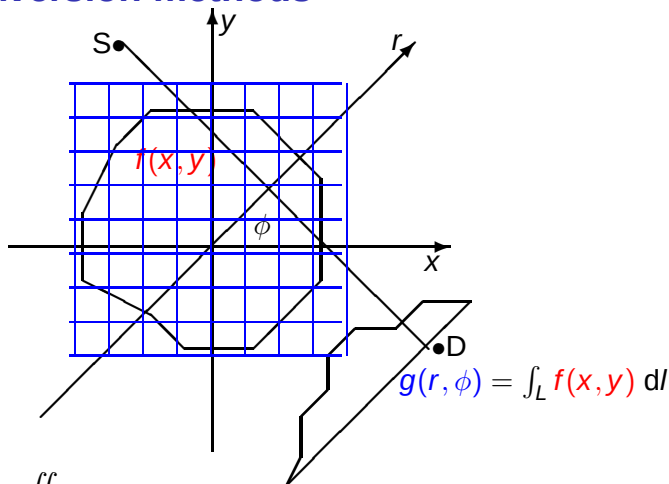

Radon :

$$g(r, \phi) = \iint_D f(x, y) \delta(r - x \cos \phi - y \sin \phi) dx dy$$

$$f(x, y) = \left(-\frac{1}{2\pi^2} \right) \int_0^\pi \int_{-\infty}^{+\infty} \frac{\frac{\partial}{\partial r} g(r, \phi)}{(r - x \cos \phi - y \sin \phi)} dr d\phi$$

Filtered Backprojection method

$$f(x, y) = \left(-\frac{1}{2\pi^2} \right) \int_0^\pi \int_{-\infty}^{+\infty} \frac{\frac{\partial}{\partial r} g(r, \phi)}{(r - x \cos \phi - y \sin \phi)} dr d\phi$$


$$\text{Derivation } \mathcal{D} : \quad \bar{g}(r, \phi) = \frac{\partial g(r, \phi)}{\partial r}$$

$$\text{Hilbert Transform } \mathcal{H} : \quad g_1(r', \phi) = \frac{1}{\pi} \int_0^\infty \frac{\bar{g}(r, \phi)}{(r - r')} dr$$


$$\text{Backprojection } \mathcal{B} : f(x, y) = \frac{1}{2\pi} \int_0^\pi g_1(r' = x \cos \phi + y \sin \phi, \phi) d\phi$$

$$f(x, y) = \mathcal{B} \mathcal{H} \mathcal{D} g(r, \phi) = \mathcal{B} \mathcal{F}_1^{-1} |\Omega| \mathcal{F}_1 g(r, \phi)$$

- Backprojection of filtered projections :




Limitations : Limited angle or noisy data

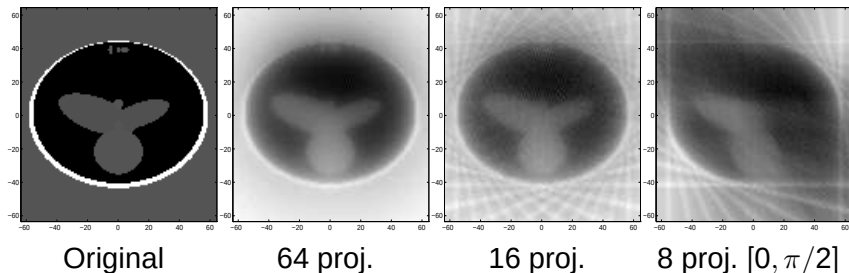

- ▶ Limited angle or noisy data
- ▶ Accounting for detector size
- ▶ Other measurement geometries : fan beam, ...

Limitations : Limited angle or noisy data

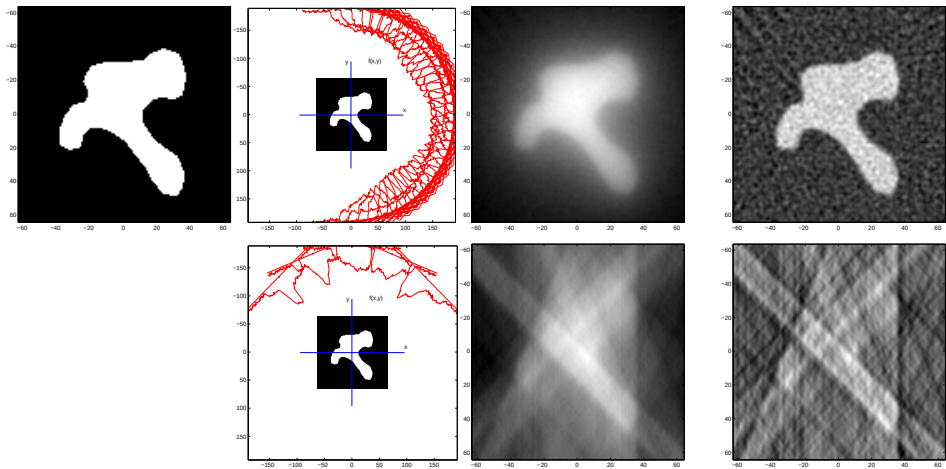

Original

Data

Backprojection

Filtered Backprojection

Parametric methods

- ▶ $f(r)$ is described in a parametric form with a very few number of parameters θ and one searches $\hat{\theta}$ which minimizes a criterion such as :
- ▶ Least Squares (LS) : $Q(\theta) = \sum_i |g_i - [\mathcal{H}f(\theta)]_i|^2$
- ▶ Robust criteria : $Q(\theta) = \sum_i \phi(|g_i - [\mathcal{H}f(\theta)]_i|)$
with different functions ϕ (L_1 , Hubert, ...).
- ▶ Likelihood : $\mathcal{L}(\theta) = -\ln p(g|\theta)$
- ▶ Penalized likelihood : $\mathcal{L}(\theta) = -\ln p(g|\theta) + \lambda\Omega(\theta)$

Examples :

- ▶ Spectrometry : $f(t)$ modelled as a sum of gaussians
 $f(t) = \sum_{k=1}^K a_k \mathcal{N}(t|\mu_k, v_k)$ $\theta = \{a_k, \mu_k, v_k\}$
- ▶ Tomography in CND : $f(x, y)$ is modelled as a superposition of circular or elliptical discs
 $\theta = \{a_k, \mu_k, r_k\}$

Non parametric methods

$$g(s_i) = \int h(s_i, \mathbf{r}) \mathbf{f}(\mathbf{r}) \, d\mathbf{r} + \epsilon(s_i), \quad i = 1, \dots, M$$

- ▶ $\mathbf{f}(\mathbf{r})$ is assumed to be well approximated by

$$\mathbf{f}(\mathbf{r}) \simeq \sum_{j=1}^N \mathbf{f}_j b_j(\mathbf{r})$$

with $\{b_j(\mathbf{r})\}$ a basis or any other set of known functions

$$g(s_i) = g_i \simeq \sum_{j=1}^N \mathbf{f}_j \int h(s_i, \mathbf{r}) b_j(\mathbf{r}) \, d\mathbf{r}, \quad i = 1, \dots, M$$

$$\mathbf{g} = \mathbf{H} \mathbf{f} + \epsilon \quad \text{with} \quad H_{ij} = \int h(s_i, \mathbf{r}) b_j(\mathbf{r}) \, d\mathbf{r}$$

- ▶ $\mathbf{H}$ is huge dimensional
- ▶ LS solution : $\hat{\mathbf{f}} = \arg \min_{\mathbf{f}} \{Q(\mathbf{f})\}$ with
 $Q(\mathbf{f}) = \sum_i |g_i - [\mathbf{H} \mathbf{f}]_i|^2 = \|\mathbf{g} - \mathbf{H} \mathbf{f}\|^2$
does not give satisfactory result.

Inversion : Deterministic methods

Data matching

- ▶ Observation model

$$g_i = h_i(\mathbf{f}) + \epsilon_i, \quad i = 1, \dots, M \longrightarrow \mathbf{g} = \mathbf{H}(\mathbf{f}) + \boldsymbol{\epsilon}$$

- ▶ Mismatch between data and output of the model $\Delta(\mathbf{g}, \mathbf{H}(\mathbf{f}))$

$$\hat{\mathbf{f}} = \arg \min_{\mathbf{f}} \{ \Delta(\mathbf{g}, \mathbf{H}(\mathbf{f})) \}$$

- ▶ Examples :

$$\text{-- LS} \quad \Delta(\mathbf{g}, \mathbf{H}(\mathbf{f})) = \|\mathbf{g} - \mathbf{H}(\mathbf{f})\|^2 = \sum_i |g_i - h_i(\mathbf{f})|^2$$

$$\text{-- } L_p \quad \Delta(\mathbf{g}, \mathbf{H}(\mathbf{f})) = \|\mathbf{g} - \mathbf{H}(\mathbf{f})\|^p = \sum_i |g_i - h_i(\mathbf{f})|^p, \quad 1 < p < 2$$

$$\text{-- KL} \quad \Delta(\mathbf{g}, \mathbf{H}(\mathbf{f})) = \sum_i g_i \ln \frac{g_i}{h_i(\mathbf{f})}$$

- ▶ In general, does not give satisfactory results for inverse problems.

Regularization theory

Inverse problems = Ill posed problems

→ Need for prior information

Functional space (Tikhonov) :

$$g = \mathcal{H}(f) + \epsilon \longrightarrow J(f) = \|g - \mathcal{H}(f)\|_2^2 + \lambda \|Df\|_2^2$$

Finite dimensional space (Philips & Towney) : $g = H(f) + \epsilon$

- Minimum norm LS (MNLS) : $J(f) = \|g - H(f)\|_2^2 + \lambda \|f\|_2^2$
- Classical regularization : $J(f) = \|g - H(f)\|_2^2 + \lambda \|Df\|_2^2$
- More general regularization :

$$J(f) = \mathcal{Q}(g - H(f)) + \lambda \Omega(Df)$$

or

$$J(f) = \Delta_1(g, H(f)) + \lambda \Delta_2(f, f_\infty)$$

Limitations :

- Errors are considered implicitly white and Gaussian
- Limited prior information on the solution
- Lack of tools for the determination of the hyperparameters

Inversion : Probabilistic methods

Taking account of errors and uncertainties → Probability theory

- ▶ Maximum Likelihood (ML)
- ▶ Minimum Inaccuracy (MI)
- ▶ Probability Distribution Matching (PDM)
- ▶ Maximum Entropy (ME) and Information Theory (IT)
- ▶ Bayesian Inference (BAYES)

Advantages :

- ▶ Explicit account of the errors and noise
- ▶ A large class of priors via explicit or implicit modeling
- ▶ A coherent approach to combine information content of the data and priors

Limitations :

- ▶ Practical implementation and cost of calculation

Bayesian estimation approach

$$\mathcal{M} : \quad \mathbf{g} = \mathbf{H}\mathbf{f} + \epsilon$$

- Observation model $\mathcal{M}$ + Hypothesis on the noise $\epsilon \longrightarrow$

$$p(\mathbf{g}|\mathbf{f}; \mathcal{M}) = p_{\epsilon}(\mathbf{g} - \mathbf{H}\mathbf{f})$$

- A priori information $p(\mathbf{f}|\mathcal{M})$

- Bayes :
$$p(\mathbf{f}|\mathbf{g}; \mathcal{M}) = \frac{p(\mathbf{g}|\mathbf{f}; \mathcal{M}) p(\mathbf{f}|\mathcal{M})}{p(\mathbf{g}|\mathcal{M})}$$

Link with regularization :

Maximum A Posteriori (MAP) :

$$\begin{aligned}\hat{\mathbf{f}} &= \arg \max_{\mathbf{f}} \{p(\mathbf{f}|\mathbf{g})\} = \arg \max_{\mathbf{f}} \{p(\mathbf{g}|\mathbf{f}) p(\mathbf{f})\} \\ &= \arg \min_{\mathbf{f}} \{-\ln p(\mathbf{g}|\mathbf{f}) - \ln p(\mathbf{f})\}\end{aligned}$$

with $Q(\mathbf{g}, \mathbf{H}\mathbf{f}) = -\ln p(\mathbf{g}|\mathbf{f})$ and $\lambda\Omega(\mathbf{f}) = -\ln p(\mathbf{f})$

Case of linear models and Gaussian priors

$$\mathbf{g} = \mathbf{H}\mathbf{f} + \epsilon$$

- ▶ Hypothesis on the noise : $\epsilon \sim \mathcal{N}(0, \sigma_\epsilon^2 \mathbf{I}) \longrightarrow$

$$p(\mathbf{g}|\mathbf{f}) \propto \exp \left\{ -\frac{1}{2\sigma_\epsilon^2} \|\mathbf{g} - \mathbf{H}\mathbf{f}\|^2 \right\}$$

- ▶ Hypothesis on $\mathbf{f}$: $\mathbf{f} \sim \mathcal{N}(0, \sigma_f^2 (\mathbf{D}^t \mathbf{D})^{-1}) \longrightarrow$

$$p(\mathbf{f}) \propto \exp \left\{ -\frac{1}{2\sigma_f^2} \|\mathbf{D}\mathbf{f}\|^2 \right\}$$

- ▶ A posteriori :

$$p(\mathbf{f}|\mathbf{g}) \propto \exp \left\{ -\frac{1}{2\sigma_\epsilon^2} \|\mathbf{g} - \mathbf{H}\mathbf{f}\|^2 - \frac{1}{2\sigma_f^2} \|\mathbf{D}\mathbf{f}\|^2 \right\}$$

- ▶ MAP : $\hat{\mathbf{f}} = \arg \max_{\mathbf{f}} \{p(\mathbf{f}|\mathbf{g})\} = \arg \min_{\mathbf{f}} \{J(\mathbf{f})\}$

$$\text{with } J(\mathbf{f}) = \|\mathbf{g} - \mathbf{H}\mathbf{f}\|^2 + \lambda \|\mathbf{D}\mathbf{f}\|^2, \quad \lambda = \frac{\sigma_\epsilon^2}{\sigma_f^2}$$

- ▶ Advantage : characterization of the solution

$$\mathbf{f}|\mathbf{g} \sim \mathcal{N}(\hat{\mathbf{f}}, \hat{\mathbf{P}}) \text{ with } \hat{\mathbf{f}} = \hat{\mathbf{P}}\mathbf{H}^t \mathbf{g}, \quad \hat{\mathbf{P}} = (\mathbf{H}^t \mathbf{H} + \lambda \mathbf{D}^t \mathbf{D})^{-1}$$

MAP estimation with other priors :

$$\hat{\mathbf{f}} = \arg \min_{\mathbf{f}} \{J(\mathbf{f})\} \quad \text{avec} \quad J(\mathbf{f}) = \|\mathbf{g} - \mathbf{H}\mathbf{f}\|^2 + \lambda\Omega(\mathbf{f})$$

Separable priors :

- ▶ Gaussian : $p(f_j) \propto \exp \{-\alpha|f_j|^2\} \longrightarrow \Omega(\mathbf{f}) = \alpha \sum_j |f_j|^2$
- ▶ Gamma : $p(f_j) \propto f_j^\alpha \exp \{-\beta f_j\} \longrightarrow \Omega(\mathbf{f}) = \alpha \sum_j \ln f_j + \beta f_j$
- ▶ Beta :
 $p(f_j) \propto f_j^\alpha (1 - f_j)^\beta \longrightarrow \Omega(\mathbf{f}) = \alpha \sum_j \ln f_j + \beta \sum_j \ln(1 - f_j)$
- ▶ Generalized Gaussian :
 $p(f_j) \propto \exp \{-\alpha|f_j|^p\}, \quad 1 < p < 2 \longrightarrow \Omega(\mathbf{f}) = \alpha \sum_j |f_j|^p,$

Markovian models :

$$p(f_j|\mathbf{f}) \propto \exp \left\{ -\alpha \sum_{i \in N_j} \phi(f_j, f_i) \right\} \longrightarrow \Omega(\mathbf{f}) = \alpha \sum_j \sum_{i \in N_j} \phi(f_j, f_i),$$

MAP estimation with markovien priors :

$$\hat{\mathbf{f}} = \arg \min_{\mathbf{f}} \{J(\mathbf{f})\} \quad \text{with} \quad J(\mathbf{f}) = \|\mathbf{g} - \mathbf{H}\mathbf{f}\|^2 + \lambda\Omega(\mathbf{f})$$

$$\Omega(\mathbf{f}) = \sum_j \phi(\mathbf{f}_j - \mathbf{f}_{j-1})$$

with $\phi(t)$:

Convex functions :

$$|t|^\alpha, \sqrt{1+t^2} - 1, \log(\cosh(t)), \quad \begin{cases} t^2 & |t| \leq T \\ 2T|t| - T^2 & |t| > T \end{cases}$$

or Non convex functions :

$$\log(1+t^2), \quad \frac{t^2}{1+t^2}, \quad \arctan(t^2), \quad \begin{cases} t^2 & |t| \leq T \\ T^2 & |t| > T \end{cases}$$

Main advantages of the Bayesian approach

- ▶ MAP = Regularization
- ▶ Posterior mean ? Marginal MAP ?
- ▶ More information in the posterior law than only its mode or its mean
- ▶ Meaning and tools for estimating hyper parameters
- ▶ Meaning and tools for model selection
- ▶ More specific and specialized priors, particularly through the hidden variables
- ▶ More computational tools :
 - ▶ Expectation-Maximization for computing the maximum likelihood parameters
 - ▶ MCMC for posterior exploration
 - ▶ Variational Bayes for analytical computation of the posterior marginals
 - ▶ ...

Full Bayesian approach

$$\mathcal{M} : \quad \mathbf{g} = \mathbf{H}\mathbf{f} + \epsilon$$


- ▶ Forward & errors model : $\longrightarrow p(\mathbf{g}|\mathbf{f}, \boldsymbol{\theta}_1; \mathcal{M})$
- ▶ Prior models $\longrightarrow p(\mathbf{f}|\boldsymbol{\theta}_2; \mathcal{M})$
- ▶ Hyperparameters $\boldsymbol{\theta} = (\boldsymbol{\theta}_1, \boldsymbol{\theta}_2) \longrightarrow p(\boldsymbol{\theta}|\mathcal{M})$
- ▶ Bayes : $\longrightarrow p(\mathbf{f}, \boldsymbol{\theta}|\mathbf{g}; \mathcal{M}) = \frac{p(\mathbf{g}|\mathbf{f}, \boldsymbol{\theta}; \mathcal{M}) p(\mathbf{f}|\boldsymbol{\theta}; \mathcal{M}) p(\boldsymbol{\theta}|\mathcal{M})}{p(\mathbf{g}|\mathcal{M})}$
- ▶ Joint MAP : $(\hat{\mathbf{f}}, \hat{\boldsymbol{\theta}}) = \arg \max_{(\mathbf{f}, \boldsymbol{\theta})} \{p(\mathbf{f}, \boldsymbol{\theta}|\mathbf{g}; \mathcal{M})\}$
- ▶ Marginalization : $\begin{cases} p(\mathbf{f}|\mathbf{g}; \mathcal{M}) &= \int p(\mathbf{f}, \boldsymbol{\theta}|\mathbf{g}; \mathcal{M}) \, \mathrm{d}\mathbf{f} \\ p(\boldsymbol{\theta}|\mathbf{g}; \mathcal{M}) &= \int p(\mathbf{f}, \boldsymbol{\theta}|\mathbf{g}; \mathcal{M}) \, \mathrm{d}\boldsymbol{\theta} \end{cases}$
- ▶ Posterior means : $\begin{cases} \hat{\mathbf{f}} &= \int \mathbf{f} p(\mathbf{f}, \boldsymbol{\theta}|\mathbf{g}; \mathcal{M}) \, \mathrm{d}\mathbf{f} \, \mathrm{d}\boldsymbol{\theta} \\ \hat{\boldsymbol{\theta}} &= \int \boldsymbol{\theta} p(\mathbf{f}, \boldsymbol{\theta}|\mathbf{g}; \mathcal{M}) \, \mathrm{d}\mathbf{f} \, \mathrm{d}\boldsymbol{\theta} \end{cases}$
- ▶ Evidence of the model :

$$p(\mathbf{g}|\mathcal{M}) = \iint p(\mathbf{g}|\mathbf{f}, \boldsymbol{\theta}; \mathcal{M}) p(\mathbf{f}|\boldsymbol{\theta}; \mathcal{M}) p(\boldsymbol{\theta}|\mathcal{M}) \, \mathrm{d}\mathbf{f} \, \mathrm{d}\boldsymbol{\theta}$$


Two main steps in the Bayesian approach

- ▶ Prior modeling
 - ▶ Separable :
Gaussian, Generalized Gaussian, Gamma, mixture of Gaussians, mixture of Gammas, ...
 - ▶ Markovian : Gauss-Markov, GGM, ...
 - ▶ Separable or Markovian with **hidden variables** (contours, region labels)
- ▶ Choice of the estimator and computational aspects
 - ▶ MAP, Posterior mean, Marginal MAP
 - ▶ MAP needs **optimization** algorithms
 - ▶ Posterior mean needs **integration** methods
 - ▶ Marginal MAP needs integration and optimization
 - ▶ Approximations :
 - ▶ Gaussian approximation (Laplace)
 - ▶ Numerical exploration MCMC
 - ▶ Variational Bayes (Separable approximation)


Which images I am looking for ?




Which image I am looking for ?

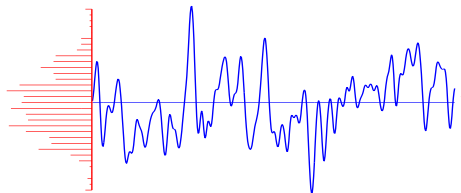


Gauss-Markov

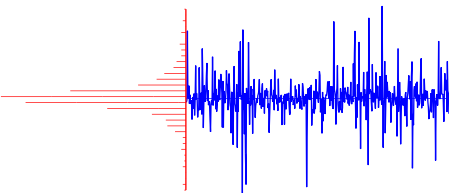

Generalized GM

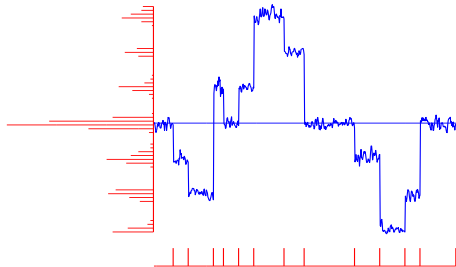

Piecewise Gaussian

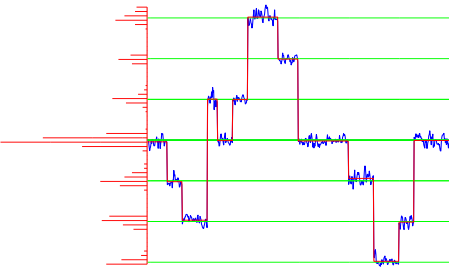

Mixture of GM

Markovian prior models for images

$$\Omega(f) = \sum_j \phi(f_j - f_{j-1})$$

- ▶ Gauss-Markov : $\phi(t) = |t|^2$
- ▶ Generalized Gauss-Markov : $\phi(t) = |t|^\alpha$
- ▶ Picewise Gauss-Markov or GGM : $\phi(t) = \begin{cases} t^2 & |t| \leq T \\ T^2 & |t| > T \end{cases}$
or equivalently :

$$\Omega(f|q) = \sum_j (1 - q_j) \phi(f_j - f_{j-1})$$

q line process (contours)

- ▶ Mixture of Gaussians :


$$\Omega(f|z) = \sum_k \sum_{\{j: z_j=k\}} \left(\frac{f_j - m_k}{v_k} \right)^2$$

z region labels process.

Gauss-Markov-Potts prior models for images



$f(\mathbf{r})$



$z(\mathbf{r})$



$c(\mathbf{r}) = 1 - \delta(z(\mathbf{r}) - z(\mathbf{r}'))$

$$p(f(\mathbf{r})|z(\mathbf{r}) = k, m_k, v_k) = \mathcal{N}(m_k, v_k)$$

$$p(f(\mathbf{r})) = \sum_k P(z(\mathbf{r}) = k) \mathcal{N}(m_k, v_k) \quad \text{Mixture of Gaussians}$$

- ▶ Separable iid hidden variables : $p(z) = \prod_r p(z(\mathbf{r}))$
- ▶ Markovian hidden variables : $p(z)$ Potts-Markov :


$$p(z(\mathbf{r})|z(\mathbf{r}'), \mathbf{r}' \in \mathcal{V}(\mathbf{r})) \propto \exp \left\{ \gamma \sum_{\mathbf{r}' \in \mathcal{V}(\mathbf{r})} \delta(z(\mathbf{r}) - z(\mathbf{r}')) \right\}$$

$$p(z) \propto \exp \left\{ \gamma \sum_{\mathbf{r} \in \mathcal{R}} \sum_{\mathbf{r}' \in \mathcal{V}(\mathbf{r})} \delta(z(\mathbf{r}) - z(\mathbf{r}')) \right\}$$

Four different cases

To each pixel of the image is associated 2 variables $f(r)$ and $z(r)$

- ▶ $f|z$ Gaussian iid, z iid :
Mixture of Gaussians
- ▶ $f|z$ Gauss-Markov, z iid :
Mixture of Gauss-Markov
- ▶ $f|z$ Gaussian iid, z Potts-Markov :
Mixture of Independent Gaussians
(MIG with Hidden Potts)
- ▶ $f|z$ Markov, z Potts-Markov :
Mixture of Gauss-Markov
(MGM with hidden Potts)

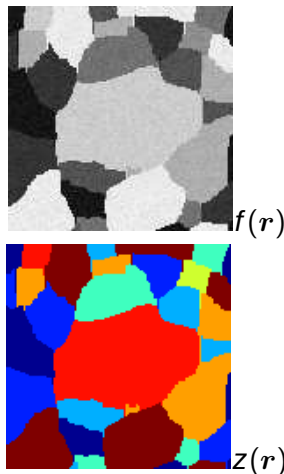

Case 1 : $f|z$ Gaussian iid, z iid

Independent Mixture of Independent Gaussiens (IMIG) :

$$p(f(\mathbf{r})|z(\mathbf{r}) = k) = \mathcal{N}(m_k, v_k), \quad \forall \mathbf{r} \in \mathcal{R}$$
$$p(f(\mathbf{r})) = \sum_{k=1}^K \alpha_k \mathcal{N}(m_k, v_k), \text{ with } \sum_k \alpha_k = 1.$$

$$p(z) = \prod_{\mathbf{r}} p(z(\mathbf{r}) = k) = \prod_{\mathbf{r}} \alpha_k = \prod_k \alpha_k^{n_k}$$

Noting

$$m_z(\mathbf{r}) = m_k, v_z(\mathbf{r}) = v_k, \alpha_z(\mathbf{r}) = \alpha_k, \forall \mathbf{r} \in \mathcal{R}_k$$

we have :

$$p(f|z) = \prod_{\mathbf{r} \in \mathcal{R}} \mathcal{N}(m_z(\mathbf{r}), v_z(\mathbf{r}))$$
$$p(z) = \prod_{\mathbf{r}} \alpha_z(\mathbf{r}) = \prod_k \alpha_k^{\sum_{\mathbf{r} \in \mathcal{R}} \delta(z(\mathbf{r}) - k)} = \prod_k \alpha_k^{n_k}$$

Case 2 : $f|z$ Gauss-Markov, z iid

Independent Mixture of Gauss-Markov (IMGGM) :

$$p(f(\mathbf{r})|z(\mathbf{r}), z(\mathbf{r}'), f(\mathbf{r}'), \mathbf{r}' \in \mathcal{V}(\mathbf{r})) = \mathcal{N}(\mu_z(\mathbf{r}), \mathbf{v}_z(\mathbf{r})), \forall \mathbf{r} \in \mathcal{R}$$

$$\begin{aligned}\mu_z(\mathbf{r}) &= \frac{1}{|\mathcal{V}(\mathbf{r})|} \sum_{\mathbf{r}' \in \mathcal{V}(\mathbf{r})} \mu_z^*(\mathbf{r}') \\ \mu_z^*(\mathbf{r}') &= \delta(z(\mathbf{r}') - z(\mathbf{r})) f(\mathbf{r}') + (1 - \delta(z(\mathbf{r}') - z(\mathbf{r}))) m_z(\mathbf{r}') \\ &= (1 - c(\mathbf{r}')) f(\mathbf{r}') + c(\mathbf{r}') m_z(\mathbf{r}')\end{aligned}$$

$$\begin{aligned}p(f|z) &\propto \prod_{\mathbf{r}} \mathcal{N}(\mu_z(\mathbf{r}), \mathbf{v}_z(\mathbf{r})) \propto \prod_k \alpha_k \mathcal{N}(m_k \mathbf{1}, \mathbf{\Sigma}_k) \\ p(z) &= \prod_{\mathbf{r}} \mathbf{v}_z(\mathbf{r}) = \prod_k \alpha_k^{n_k}\end{aligned}$$

with $\mathbf{1}_k = \mathbf{1}, \forall \mathbf{r} \in \mathcal{R}_k$ and $\mathbf{\Sigma}_k$ a covariance matrix ($n_k \times n_k$).

Case 3 : $f|z$ Gauss iid, z Potts

Gauss iid as in Case 1 :

$$p(f|z) = \prod_{\mathbf{r} \in \mathcal{R}} \mathcal{N}(m_z(\mathbf{r}), v_z(\mathbf{r})) = \prod_k \prod_{\mathbf{r} \in \mathcal{R}_k} \mathcal{N}(m_k, v_k)$$

Potts-Markov

$$p(z(\mathbf{r})|z(\mathbf{r}'), \mathbf{r}' \in \mathcal{V}(\mathbf{r})) \propto \exp \left\{ \gamma \sum_{\mathbf{r}' \in \mathcal{V}(\mathbf{r})} \delta(z(\mathbf{r}) - z(\mathbf{r}')) \right\}$$

$$p(z) \propto \exp \left\{ \gamma \sum_{\mathbf{r} \in \mathcal{R}} \sum_{\mathbf{r}' \in \mathcal{V}(\mathbf{r})} \delta(z(\mathbf{r}) - z(\mathbf{r}')) \right\}$$

Case 4 : $f|z$ Gauss-Markov, z Potts

Gauss-Markov as in Case 2 :

$$p(f(r)|z(r), z(r'), f(r'), r' \in \mathcal{V}(r)) = \mathcal{N}(\mu_z(r), v_z(r)), \forall r \in \mathcal{R}$$


$$\begin{aligned}\mu_z(r) &= \frac{1}{|\mathcal{V}(r)|} \sum_{r' \in \mathcal{V}(r)} \mu_z^*(r') \\ \mu_z^*(r') &= \delta(z(r') - z(r)) f(r') + (1 - \delta(z(r') - z(r))) m_z(r')\end{aligned}$$

$$p(f|z) \propto \prod_r \mathcal{N}(\mu_z(r), v_z(r)) \propto \prod_k \alpha_k \mathcal{N}(m_k \mathbf{1}, \Sigma_k)$$

Potts-Markov as in Case 3 :


$$p(z) \propto \exp \left\{ \gamma \sum_{r \in \mathcal{R}} \sum_{r' \in \mathcal{V}(r)} \delta(z(r) - z(r')) \right\}$$

Summary of the two proposed models



$f|z$ Gaussian iid
 z Potts-Markov

(MIG with Hidden Potts)



$f|z$ Markov
 z Potts-Markov

(MGM with hidden Potts)

Bayesian Computation

$$p(\mathbf{f}, \mathbf{z}, \boldsymbol{\theta} | \mathbf{g}) \propto p(\mathbf{g} | \mathbf{f}, \mathbf{z}, \mathbf{v}_\epsilon) p(\mathbf{f} | \mathbf{z}, \mathbf{m}, \mathbf{v}) p(\mathbf{z} | \boldsymbol{\gamma}, \boldsymbol{\alpha}) p(\boldsymbol{\theta})$$

$$\boldsymbol{\theta} = \{\mathbf{v}_\epsilon, (\alpha_k, \mathbf{m}_k, \mathbf{v}_k), k = 1, \dots, K\} \quad p(\boldsymbol{\theta}) \quad \text{Conjugate priors}$$

- ▶ Direct computation and use of $p(\mathbf{f}, \mathbf{z}, \boldsymbol{\theta} | \mathbf{g}; \mathcal{M})$ is too complex
- ▶ Possible approximations :
 - ▶ Gauss-Laplace (Gaussian approximation)
 - ▶ Exploration (Sampling) using MCMC methods
 - ▶ Separable approximation (Variational techniques)
- ▶ Main idea in Variational Bayesian methods :

Approximate

$$p(\mathbf{f}, \mathbf{z}, \boldsymbol{\theta} | \mathbf{g}; \mathcal{M}) \quad \text{by} \quad q(\mathbf{f}, \mathbf{z}, \boldsymbol{\theta}) = q_1(\mathbf{f}) q_2(\mathbf{z}) q_3(\boldsymbol{\theta})$$

- ▶ Choice of approximation criterion : $KL(q : p)$
- ▶ Choice of appropriate families of probability laws for $q_1(\mathbf{f})$, $q_2(\mathbf{z})$ and $q_3(\boldsymbol{\theta})$

MCMC based algorithm

$$p(\mathbf{f}, \mathbf{z}, \boldsymbol{\theta} | \mathbf{g}) \propto p(\mathbf{g} | \mathbf{f}, \mathbf{z}, \boldsymbol{\theta}) p(\mathbf{f} | \mathbf{z}, \boldsymbol{\theta}) p(\mathbf{z}) p(\boldsymbol{\theta})$$


General scheme :

$$\hat{\mathbf{f}} \sim p(\mathbf{f} | \hat{\mathbf{z}}, \hat{\boldsymbol{\theta}}, \mathbf{g}) \longrightarrow \hat{\mathbf{z}} \sim p(\mathbf{z} | \hat{\mathbf{f}}, \hat{\boldsymbol{\theta}}, \mathbf{g}) \longrightarrow \hat{\boldsymbol{\theta}} \sim (\boldsymbol{\theta} | \hat{\mathbf{f}}, \hat{\mathbf{z}}, \mathbf{g})$$

- ▶ Estimate $\mathbf{f}$ using $p(\mathbf{f} | \hat{\mathbf{z}}, \hat{\boldsymbol{\theta}}, \mathbf{g}) \propto p(\mathbf{g} | \mathbf{f}, \boldsymbol{\theta}) p(\mathbf{f} | \hat{\mathbf{z}}, \hat{\boldsymbol{\theta}})$
Needs optimisation of a quadratic criterion.
- ▶ Estimate $\mathbf{z}$ using $p(\mathbf{z} | \hat{\mathbf{f}}, \hat{\boldsymbol{\theta}}, \mathbf{g}) \propto p(\mathbf{g} | \hat{\mathbf{f}}, \hat{\mathbf{z}}, \hat{\boldsymbol{\theta}}) p(\mathbf{z})$
Needs sampling of a Potts Markov field.
- ▶ Estimate $\boldsymbol{\theta}$ using
 $p(\boldsymbol{\theta} | \hat{\mathbf{f}}, \hat{\mathbf{z}}, \mathbf{g}) \propto p(\mathbf{g} | \hat{\mathbf{f}}, \sigma_{\epsilon}^2 \mathbf{I}) p(\hat{\mathbf{f}} | \hat{\mathbf{z}}, (m_k, v_k)) p(\boldsymbol{\theta})$
Conjugate priors $\longrightarrow$ analytical expressions.

Application of CT in NDT

Reconstruction from only 2 projections



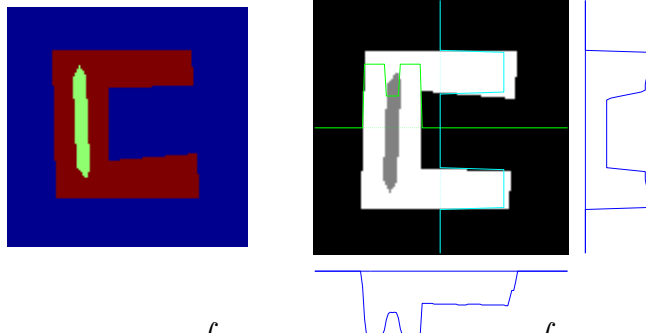


$$g_1(x) = \int f(x, y) dy, \quad g_2(y) = \int f(x, y) dx$$

- ▶ Given the marginals $g_1(x)$ and $g_2(y)$ find the joint distribution $f(x, y)$.
- ▶ Infinite number of solutions : $f(x, y) = g_1(x) g_2(y) \Omega(x, y)$
 $\Omega(x, y)$ is a Copula :

$$\int \Omega(x, y) dx = 1 \quad \text{and} \quad \int \Omega(x, y) dy = 1$$

Application in CT



$$g|f$$

$$g = Hf + \epsilon$$

$$g|f \sim \mathcal{N}(Hf, \sigma_\epsilon^2 I)$$

Gaussian

$$f|z$$

iid Gaussian
or
Gauss-Markov

$$z$$

iid
or
Potts

$$c$$

$$c(r) \in \{0, 1\}$$

$$1 - \delta(z(r) - z(r'))$$

binary

Proposed algorithm

$$p(\mathbf{f}, \mathbf{z}, \boldsymbol{\theta} | \mathbf{g}) \propto p(\mathbf{g} | \mathbf{f}, \mathbf{z}, \boldsymbol{\theta}) p(\mathbf{f} | \mathbf{z}, \boldsymbol{\theta}) p(\boldsymbol{\theta})$$


General scheme :

$$\hat{\mathbf{f}} \sim p(\mathbf{f} | \hat{\mathbf{z}}, \hat{\boldsymbol{\theta}}, \mathbf{g}) \longrightarrow \hat{\mathbf{z}} \sim p(\mathbf{z} | \hat{\mathbf{f}}, \hat{\boldsymbol{\theta}}, \mathbf{g}) \longrightarrow \hat{\boldsymbol{\theta}} \sim (\boldsymbol{\theta} | \hat{\mathbf{f}}, \hat{\mathbf{z}}, \mathbf{g})$$


Iterative algorithm :

- ▶ Estimate $\mathbf{f}$ using $p(\mathbf{f} | \hat{\mathbf{z}}, \hat{\boldsymbol{\theta}}, \mathbf{g}) \propto p(\mathbf{g} | \mathbf{f}, \boldsymbol{\theta}) p(\mathbf{f} | \hat{\mathbf{z}}, \hat{\boldsymbol{\theta}})$
Needs **optimisation** of a quadratic criterion.
- ▶ Estimate $\mathbf{z}$ using $p(\mathbf{z} | \hat{\mathbf{f}}, \hat{\boldsymbol{\theta}}, \mathbf{g}) \propto p(\mathbf{g} | \hat{\mathbf{f}}, \hat{\mathbf{z}}, \hat{\boldsymbol{\theta}}) p(\mathbf{z})$
Needs **sampling of a Potts Markov field**.
- ▶ Estimate $\boldsymbol{\theta}$ using
 $p(\boldsymbol{\theta} | \hat{\mathbf{f}}, \hat{\mathbf{z}}, \mathbf{g}) \propto p(\mathbf{g} | \hat{\mathbf{f}}, \sigma_{\epsilon}^2 \mathbf{I}) p(\hat{\mathbf{f}} | \hat{\mathbf{z}}, (m_k, v_k)) p(\boldsymbol{\theta})$
Conjugate priors $\longrightarrow$ **analytical expressions**.


Results




Original




Backprojection




Filtered BP




LS






Gauss-Markov+pos



GM+Line process



GM+Label process




Application in Microwave imaging


$$g(\omega) = \int \mathbf{f}(\mathbf{r}) \exp \{-j(\omega \cdot \mathbf{r})\} d\mathbf{r} + \epsilon(\omega)$$

$$g(u, v) = \int \mathbf{f}(x, y) \exp \{-j(ux + vy)\} dx dy + \epsilon(u, v)$$


$$\mathbf{g} = \mathbf{H} \mathbf{f} + \epsilon$$



$f(x, y)$



$g(u, v)$



$\hat{f}$ IFT



$\hat{f}$ Proposed method


Conclusions

- ▶ Bayesian Inference for inverse problems
- ▶ Approximations (Laplace, MCMC, Variational)
- ▶ Gauss-Markov-Potts are useful prior models for images incorporating regions and contours
- ▶ Separable approximations for Joint posterior with Gauss-Markov-Potts priors
- ▶ Application in different CT (X ray, US, Microwaves, PET, SPECT)


Perspectives :

- ▶ Efficient implementation in 2D and 3D cases
- ▶ Evaluation of performances and comparison with MCMC methods
- ▶ Application to other linear and non linear inverse problems :
(PET, SPECT or ultrasound and microwave imaging)

Color (Multi-spectral) image deconvolution

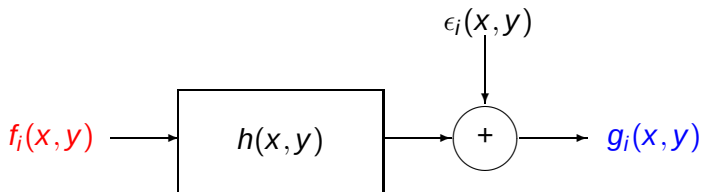


Observation model : $g_i = H f_i + \epsilon_i, \quad i = 1, 2, 3$



?

⇐




Images fusion and joint segmentation

(with O. Féron)

$$\begin{cases} g_i(\mathbf{r}) = \mathbf{f}_i(\mathbf{r}) + \epsilon_i(\mathbf{r}) \\ p(\mathbf{f}_i(\mathbf{r}) | \mathbf{z}(\mathbf{r}) = k) = \mathcal{N}(m_{ik}, \sigma_{ik}^2) \\ p(\underline{\mathbf{f}} | \mathbf{z}) = \prod_i p(\mathbf{f}_i | \mathbf{z}) \end{cases}$$



g_1




g_2

$\hat{\mathbf{f}}_1$



$\hat{\mathbf{f}}_2$




$\hat{\mathbf{z}}$

Data fusion in medical imaging

(with O. Féron)




$$\begin{cases} g_i(\mathbf{r}) = \mathbf{f}_i(\mathbf{r}) + \epsilon_i(\mathbf{r}) \\ p(\mathbf{f}_i(\mathbf{r})|z(\mathbf{r}) = k) = \mathcal{N}(m_{ik}, \sigma_{ik}^2) \\ p(\underline{\mathbf{f}}|\underline{z}) = \prod_i p(\mathbf{f}_i|\underline{z}) \end{cases}$$

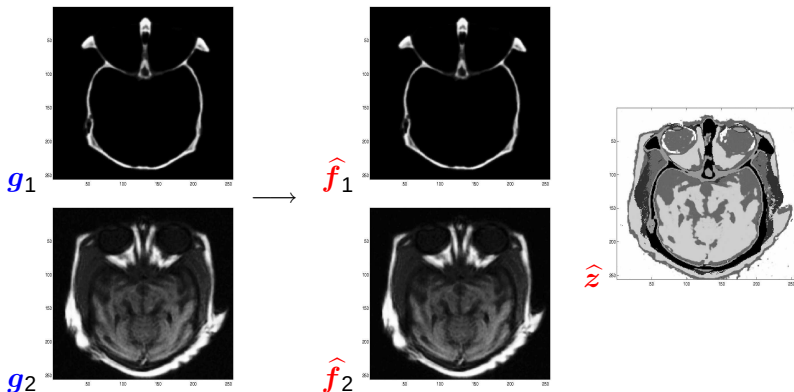

Joint segmentation of hyper-spectral images

(with N. Bali & A. Mohammadpour)


$$\left\{ \begin{array}{l} g_i(\mathbf{r}) = \mathbf{f}_i(\mathbf{r}) + \epsilon_i(\mathbf{r}) \\ p(\mathbf{f}_i(\mathbf{r})|z(\mathbf{r}) = k) = \mathcal{N}(m_{i_k}, \sigma_{i_k}^2), \quad k = 1, \dots, K \\ p(\underline{\mathbf{f}}|z) = \prod_i p(\mathbf{f}_i|z) \\ m_{i_k} \text{ follow a Markovian model along the index } i \end{array} \right.$$



Segmentation of a video sequence of images

(with P. Brault)


$$\left\{ \begin{array}{l} g_i(\mathbf{r}) = f_i(\mathbf{r}) + \epsilon_i(\mathbf{r}) \\ p(f_i(\mathbf{r})|z_i(\mathbf{r}) = k) = \mathcal{N}(m_{ik}, \sigma_{ik}^2), \quad k = 1, \dots, K \\ p(\underline{\mathbf{f}}|\underline{\mathbf{z}}) = \prod_i p(\mathbf{f}_i|z_i) \\ z_i(\mathbf{r}) \text{ follow a Markovian model along the index } i \end{array} \right.$$

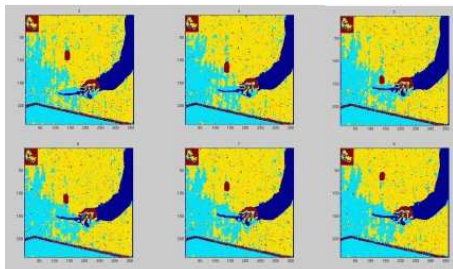

Source separation

(with H. Snoussi & M. Ichir)

$$\begin{cases} g_i(\mathbf{r}) = \sum_{j=1}^N A_{ij} f_j(\mathbf{r}) + \epsilon_i(\mathbf{r}) \\ p(f_j(\mathbf{r}) | z_j(\mathbf{r}) = k) = \mathcal{N}(m_{jk}, \sigma_{jk}^2) \\ p(A_{ij}) = \mathcal{N}(A_{0ij}, \sigma_{0ij}^2) \end{cases}$$

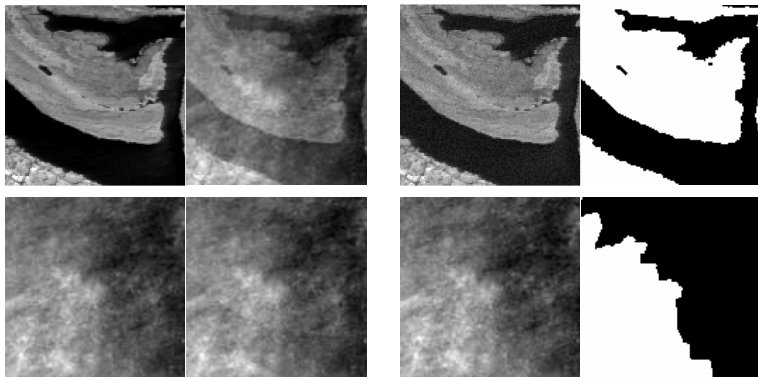

f

g

$\hat{f}$

z

Some references

- ▶ O. Féron, B. Duchène and A. Mohammad-Djafari,
Microwave imaging of inhomogeneous objects made of a finite
number of dielectric and conductive materials from experimental
data, [Inverse Problems](#), 21(6) :95-115, Dec 2005.
- ▶ M. Ichir and A. Mohammad-Djafari,
Hidden markov models for blind source separation, [IEEE Trans.
on Signal Processing](#), 15(7) :1887-1899, Jul 2006.
- ▶ F. Humblot and A. Mohammad-Djafari,
Super-Resolution using Hidden Markov Model and Bayesian
Detection Estimation Framework, [EURASIP Journal on Applied
Signal Processing](#), Special number on Super-Resolution
Imaging : Analysis, Algorithms, and Applications :ID 36971, 16
pages, 2006.
- ▶ O. Féron and A. Mohammad-Djafari,
Image fusion and joint segmentation using an MCMC algorithm,
[Journal of Electronic Imaging](#), 14(2) :paper no. 023014, Apr
2005.
- ▶ H. Snoussi and A. Mohammad-Djafari,
Fast joint separation and segmentation of mixed images, [Journal
of Electronic Imaging](#), 13(2) :240-261, April 2004.

Questions and Discussions

- ▶ Thanks for your attentions
- ▶ ...
- ▶ ...
- ▶ Questions ?
- ▶ Discussions ?
- ▶ ...
- ▶ ...